



# Outdoor

LED Screen Series

01 / Ultra Light&thin Outdoor Series

02 / Classic and Customized Series

03 / Outdoor 16:9 Ratio Series

**04** / Ultra Light Series

05 / Energy Saving Series

#### **Outdoor LED Screen**





Item	Model	P2.976	P3.91	P4.81	P6.25	P7.81	P10.42	
Pixel pitch	Unit	2.976	3.91	4.81	6.25	7.81	10.42	
LED type	N/A	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	
Pixel density	Pixels/m	112896	65536	43264	25600	16384	9216	
1odule size(WxH)	mm	500x250						
10dule resolution	Pixel	168x84 128x64 104x52 80x40 64x32					48x24	
abinet size(WxH)	mm	1000x1000/ 1000x500/ 1500x1000/ 1500x500						
Materia	N/A	Aluminum						
Screen weight	Kg/pc	22.5						
Thickness	mm	83						
Maintenance way	N/A			Front 8	& Rear			
Brightness	Nits	4500~6000						
Refresh rate	Hz	1920~3840						
ngress protection	N/A	IP65						
x. Avg. Power consumption	W/m²	650/220						

#### **Outdoor LED Screen**





Item	Model	P2.5	P3.076	P3.3	P4.0	P5.0	P5.926	P6.67	P8.0	P10
Pixel pitch	Unit	2.5	3.076	3.3	4.0	5.0	5.926	6.67	8.0	10
LED type	N/A	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1
Pixel density	Pixels/mi	160000	108232	90000	62500	40000	28476	22479	15625	10000
odule size(WxH)	mm	320x160								
odule resolution	Pixel	128x64	128x64 104x52 96x48 80x40 64x32 54x27 48x32 40x20 3							32x16
abinet size(WxH)	mm	Customized								
Materia	N/A	Aluminum/Steel								
Screen weight	Kg/m²	45								
Thickness	mm	140								
Maintenance way	N/A	Rear								
Brightness	Nits	5500~7000								
Refresh rate	Hz	1920~3840								
ngress protection	N/A	IP65								
Avg. Power consumption	W/m²	850/320								


### **Outdoor LED Screen**





SPECIFICA	TION							
Item	Model	P3.125	P4.16	P5.0	P6.25	P8.33	P10	
Pixel pitch	Unit	3.125	4.16	5.0	6.25	8.33	10	
LED type	N/A	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1	
Pixel density	Pixels/m²	102400	57600	40000	25600	14400	10000	
Module size(WxH)	mm	400x300						
Module resolution	Pixel	128x96	96x72	80x60	64x48	48x36	40x30	
Cabinet size(WxH)	mm	800x900						
Cabinet resolution	Pixel	256x288	160×216	160x180	128x144	96x108	80x90	
Materia	N/A	Aluminum						
Screen weight	Kg/pc	17.5						
Thickness	mm	98						
Maintenance way	N/A	Front & Rear						
Brightness	Nits	5000~6500						
Refresh rate	Hz	1920~3840						
Ingress protection	N/A	IP65						
Max. Avg. Power consumption	W/m²	780/280						

### **Outdoor Curtain LED Screen**

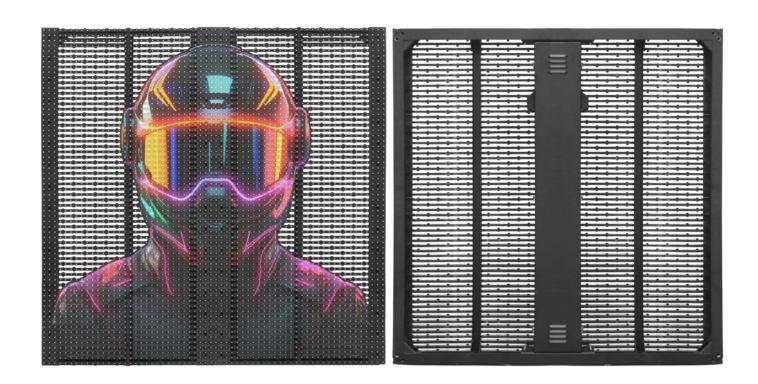

SPECIFICA	TION					
Item	Model	P15-15	P15-31			
Pixel pitch	Unit	15 -15	15-31			
LED type	N/A	DIF	570			
Pixel density	Pixels/m²	4096	2048			
Module size(WxH)	mm	500	x250			
Module resolution	Pixel	32x16	32x8			
Cabinet size(WxH)	mm	1000x1000				
Cabinet resolution	Pixel	64x64	64x32			
Materia	N/A	Aluminum				
Screen weight	Kg/pc	21	24			
Thickness	mm	8	35			
Brightness	Nits	80	000			
Refresh rate	Hz	1920~3840				
Ingress protection	N/A	IP65				
Max. Avg. Power consumption	W/m²	520	0/180			

## **Outdoor Big LED Screen**



Item	Model	P8.0	P10	P8.0	P10			
Pixel pitch	Unit	8.0	10	8.0	10			
LED type	N/A	DIP570						
Pixel density	Pixels/mi	15625	10000	15625	10000			
1odule size(WxH)	mm	320x160 320x320						
Module resolution	Pixel	40x20	32x16	40×40	32x32			
abinet size(WxH)	mm	Customized						
Materia	N/A	Aluminum/Steel						
Screen weight	Kg/m²	56	52	70	60			
Thickness	mm	140						
Maintenance way	N/A	R	lear	Front	:&Rear			
Brightness	Nits	8000~10000						
Refresh rate	Hz	1920~3840						
ngress protection	N/A	IP65						
x. Avg. Power consumption	W/m²	350~550/220						



LED Screen Manufacturer in China





Mob: +86 153 9990 6913 Web: www.bibiled.com E-mail: info@bibiled.com